




PRODUCT SPECIFICATIONS

Application	Football, Hockey, Multifunctional
Material	Physically cross-linked closed cell polyolefine foam.
Colour & Size	White, approx. 2,00 meter width, length adjustable.
Installation method	Rolls of Domoflex SB are taped together with high-performance enhanced PE-tape, assuring uniform surface bonding & integration on hot-melt basis.

Properties	Value	Unit	Method
Density	30 ± 5	kg/m ³	ISO 845
Thickness	10 ± 10	mm ± %	ISO 1923
Weight	290 ± 15	g/m ² %	internal
Width	2.000 ± 30	mm	ISO 1923
Slit size (width)	3,0 ± 2,0	mm	ISO 1923
Thermal stability	Domoflex SB is provided with "grinds" and is therefor able to absorb contraction and shrinkage which normally is caused by temperature differences in the environment.		
Tensile strength	0,2	MPa	ISO 1926
Water permeability	> 12.000	mm/h	EN 12616
Compression stress	At 25%	6	ISO 1856 C EN 1606
	At 50%	2	
Shock absorption	28 ± 5	%	FIFA 04a
Vertical deformation	7,0 ± 1	mm	FIFA 05a

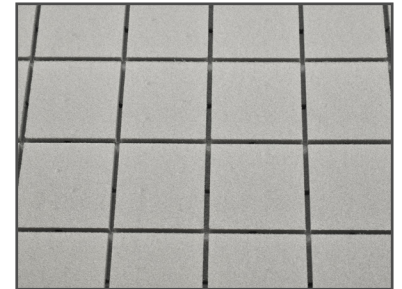

Sports and Leisure Group NV reserves the right to amend technical specifications on the above mentioned product. Delivered products can slightly differ from these technical data.
Sports and Leisure Group NV guarantees the technical quality of the proposed article.

Please do not hesitate to contact us for any further information.

MGS
435 rue de l'Artisanat
83140 Six-Fours

T: +04 86 16 42 78
F: +04 83 43 19 21

contact@mon-gazon-synthetique.com
www.mon-gazon-synthetique.com

